



the SmartShield packages



Technical Guide
presented by **Joyce**

Contents

- 3** SmartShield Glass Packages
- 4** Heritage Double-Hung
- 5** Trinity Double-Hung
- 6** Trinity Double-Hung (foam filled)
- 7** VueLine Double-Hung Trinity
- 8** Casement
- 9** Arete & Silensia Patio Doors
- 10** Glossary
- 11** ENERGY STAR® Qualification Criteria

The Joyce Promise

Since 1955, we have been committed to excellence through product innovation, state-of-the-art manufacturing facilities, and the lifetime warranties we stand behind. Founded on the principles of the company namesake, Joyce (our co-founder's late wife), we continue providing you with quality products that are crafted to enhance your home and last for generations - just as our company has.

JoyceTM
mfg. co.






SmartShield Glass Packages




Using SmartShield Glass, Joyce Windows provides the best value and performance for homeowners. The glass packages illustrated below exceed ENERGY STAR ratings and standards as they come equipped with SmartEdge Spacer and LoE coated glass insulated with Argon gas. SmartShield has specially formulated window glass packages for any climate or budget, so no matter which ENERGY STAR climate zone you are located in, Joyce will have you covered.


J2 with SmartClean*Optional
all around performance




J3 with SmartClean
solar all around performance




J11 with SmartClean
northern dual glaze performance




J21 with SmartClean
high dual glaze performance




J31 with SmartClean
solar high dual glaze performance




TJ22 with SmartClean
triple performance




TJ32 with SmartClean
solar triple performance



TJ221 with SmartClean
high triple performance



TJ321 with SmartClean
solar high triple performance





SmartShield Glass is formulated with SmartClean, an advanced and permanent coating infused with titanium dioxide (TiO₂). SmartClean helps reduce dirt and debris particles to provide windows with a naturally cleaner view. This anti-static technology delivers up to 40% less buildup of grime and dust without homeowners having to intervene. Water sheets off the surface more quickly, reducing water spots and helping the glass dry faster. By smoothing microscopic imperfections, the TiO₂ layer also makes the glass significantly easier to clean—offering lasting clarity with minimal maintenance. This low impressive coating comes as a standard on all glass packages.





Heritage Double-Hung

craftsmanship that lasts for generations





J2
with
SmartClean*

 Joyce Manufacturing Company 800.824.7988 Heritage Double Hung (HTDH) Vinyl Frame • LoE ⁺ /Clear Argon • SmartEdge Spacer Vertical Slider Window 		Although J2 is not an ENERGY STAR [®] certified glass, this option is still an excellent choice for homes in any area of the country. It offers enhanced energy efficiency that will make your home more comfortable and help keep your home energy bills lower.
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.27 0.29		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.54 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





TJ22
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Heritage Double Hung (HTDH) Vinyl Frame • Triple Glazing LoE ⁺ (2&4) • Argon • SS Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.22 0.22		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.42 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





J3
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Heritage Double Hung (HTDH) Vinyl Frame • LoE ⁺ /Clear Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.27 0.21		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.49 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





TJ32
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Heritage Double Hung (HTDH) Vinyl Frame • Triple Glazing LoE ⁺ (2)/LoE ⁺ (4) • Argon Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.21 0.18		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.39 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





J11
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Heritage Double Hung (HTDH) Vinyl Frame • LoE ⁺ /LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.24 0.48		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.59 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





TJ221
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Heritage Double Hung (HTDH) Vinyl Frame • Triple Glazing LoE ⁺ (2&4)/LoE(6) • SS Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.20 0.22		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.41 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





J21
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Heritage Double Hung (HTDH) Vinyl Frame • LoE ⁺ /LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.23 0.28		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.52 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

TJ321
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Heritage Double Hung (HTDH) Vinyl Frame • Triple Glazing LoE ⁺ (2)/LoE ⁺ (4)/LoE(6) Argon • Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.19 0.17		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.38 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

J31
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Heritage Double Hung (HTDH) Vinyl Frame • LoE ⁺ /LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.23 0.21		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.48 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

*SmartClean is optional on J2 glass.

Performance ratings for J3, J11, J21, and J31 are calculated using 1/8" double-strength glass unless noted on product series page.



Performance ratings for J2, TJ22, TJ32, TJ221, and TJ321 are calculated using 3/32" single-strength glass unless noted on product series page.

Trinity Double-Hung





performance that lasts for a lifetime

(non foam filled)





J2
with
SmartClean*

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • LoE/Clear Argon • SmartEdge Spacer Vertical Slider Window 		Although J2 is not an ENERGY STAR® certified glass, this option is still an excellent choice for homes in any area of the country. It offers enhanced energy efficiency that will make your home more comfortable and help keep your home energy bills lower.
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.29 0.29		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.54 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		





J21
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • LoE/LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.25 0.28		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.52 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		





J3
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • LoE/Clear Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.28 0.21		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.49 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		

J31
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • LoE/LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.24 0.21		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.48 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		

J11
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • LoE/LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.25 0.48		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.59 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		

*SmartClean is optional on J2 glass.

Performance ratings for J3, J11, J21, and J31 are calculated using 1/8" double-strength glass unless noted on product series page.

Performance ratings for J2 is calculated using 3/32" single-strength glass unless noted on product series page.





Trinity Double-Hung






performance that lasts for a lifetime

(foam filled frames and sashes)





J2
with
SmartClean*

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • LoE/Clear Argon • SmartEdge Spacer Vertical Slider Window 		Although J2 is not an ENERGY STAR® certified glass, this option is still an excellent choice for homes in any area of the country. It offers enhanced energy efficiency that will make your home more comfortable and help keep your home energy bills lower.
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.27 0.29		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.54 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer literature for other product performance information. www.nfrc.org</small>		






TJ22
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • Triple Glazing LoE(2&4) • Argon • SS Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions   energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.22 0.22		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.42 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer literature for other product performance information. www.nfrc.org</small>		






J3
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • LoE/Clear Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions   energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.27 0.21		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.49 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer literature for other product performance information. www.nfrc.org</small>		






TJ32
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • Triple Glazing LoE(2)/LoE(4) • SS Argon • Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions   energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.21 0.18		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.39 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer literature for other product performance information. www.nfrc.org</small>		






J11
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • LoE/LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions   energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.24 0.48		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.59 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer literature for other product performance information. www.nfrc.org</small>		






TJ221
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • Triple Glazing LoE(2&4)/LoE(6) • SS Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions   energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.20 0.22		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.41 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer literature for other product performance information. www.nfrc.org</small>		






J21
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • LoE/LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions   energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.23 0.28		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.52 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer literature for other product performance information. www.nfrc.org</small>		

TJ321
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • Triple Glazing LoE(2)/LoE(4)/LoE(6) Argon • Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions   energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.19 0.17		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.38 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer literature for other product performance information. www.nfrc.org</small>		

J31
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Trinity Double Hung (TNTDH) Vinyl Frame • LoE/LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions   energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.23 0.21		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.48 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer literature for other product performance information. www.nfrc.org</small>		

*SmartClean is optional on J2 glass.



Performance ratings for J3, J11, J21, and J31 are calculated using 1/8" double-strength glass unless noted on product series page.

Performance ratings for J2, TJ22, TJ32, TJ221, and TJ321 are calculated using 3/32" single-strength glass unless noted on product series page.





VueLine Double-Hung

a fresh perspective on value





J2
with
SmartClean*

 Joyce Manufacturing Company 800.824.7988 VueLine Double Hung (VLDH) Vinyl Frame • LoE/Clear Argon • SmartEdge Spacer Vertical Slider Window 		Although J2 is not an ENERGY STAR® certified glass, this option is still an excellent choice for homes in any area of the country. It offers enhanced energy efficiency that will make your home more comfortable and help keep your home energy bills lower.
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.29 0.29		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.55 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





TJ22
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 VueLine Double Hung (VLDH) Vinyl Frame • Triple Glazing LoE ² (2&4) • Argon • SS Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.23 0.23		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.43 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





J3
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 VueLine Double Hung (VLDH) Vinyl Frame • LoE/Clear Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.28 0.22		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.51 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

TJ32
with
SmartClean





 Joyce Manufacturing Company 800.824.7988 VueLine Double Hung (VLDH) Vinyl Frame • Triple Glazing LoE ² (2)/LoE ² (4) • SS Argon • Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.23 0.18		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.40 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

J11
with
SmartClean





 Joyce Manufacturing Company 800.824.7988 VueLine Double Hung (VLDH) Vinyl Frame • LoE/LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.26 0.49		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.61 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

TJ221
with
SmartClean

 Most Efficient
2026
Southern Zone





 Joyce Manufacturing Company 800.824.7988 VueLine Double Hung (VLDH) Vinyl Frame • Triple Glazing LoE ² (2&4)/LoE(6) • SS Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.21 0.22		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.42 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

J21
with
SmartClean





 Joyce Manufacturing Company 800.824.7988 VueLine Double Hung (VLDH) Vinyl Frame • LoE/LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.25 0.29		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.53 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

TJ321
with
SmartClean

 Most Efficient
2026
Southern Zone

 Joyce Manufacturing Company 800.824.7988 VueLine Double Hung (VLDH) Vinyl Frame • Triple Glazing LoE ² (2)/LoE ² (4)/LoE(6) Argon • Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.21 0.18		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.39 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

J31
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 VueLine Double Hung (VLDH) Vinyl Frame • LoE/LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR® Certified in Highlighted Regions  energystar.gov/windows  Certified
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.24 0.21		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.49 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

*SmartClean is optional on J2 glass.



Performance ratings for J3, J11, J21, and J31 are calculated using 1/8" double-strength glass unless noted on product series page.

Performance ratings for J2, TJ22, TJ32, TJ221, and TJ321 are calculated using 3/32" single-strength glass unless noted on product series page.





Casement

timeless durability with exceptional efficiency





J2
with
SmartClean*

 Joyce Manufacturing Company 800.824.7988 Casement (CSMT) Vinyl Frame • LoE ⁺ /Clear Argon • SmartEdge Spacer Vertical Slider Window 		Although J2 is not an ENERGY STAR [®] certified glass, this option is still an excellent choice for homes in any area of the country. It offers enhanced energy efficiency that will make your home more comfortable and help keep your home energy bills lower.
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.27 0.25		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.46 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





TJ22
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Casement (CSMT) Vinyl Frame • Triple Glazing LoE ⁺ (2&4) • Argon • SS Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.22 0.19		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.36 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





J3
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Casement (CSMT) Vinyl Frame • LoE ⁺ /Clear Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.27 0.18		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.42 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





TJ32
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Casement (CSMT) Vinyl Frame • Triple Glazing LoE ⁺ (2)/LoE ⁺ (4) • Argon Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.22 0.15		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.33 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





J11
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Casement (CSMT) Vinyl Frame • LoE ⁺ /LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.24 0.41		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.50 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





TJ221
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Casement (CSMT) Vinyl Frame • Triple Glazing LoE ⁺ (2&4)/LoE(6) • SS Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.20 0.19		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.35 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		





J21
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Casement (CSMT) Vinyl Frame • LoE ⁺ /LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.24 0.24		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.45 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

TJ321
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Heritage Double Hung (HTDH) Vinyl Frame • Triple Glazing LoE ⁺ (2)/LoE ⁺ (4)/LoE(6) Argon • Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.19 0.17		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.38 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

J31
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Casement (CSMT) Vinyl Frame • LoE ⁺ /LoE Argon • SmartEdge Spacer Vertical Slider Window 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.24 0.18		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.41 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.nfrc.org		

*SmartClean is optional on J2 glass.



Performance ratings for J3, J11, J21, and J31 are calculated using 1/8" double-strength glass unless noted on product series page.

Performance ratings for J2, TJ22, TJ32, TJ221, and TJ321 are calculated using 3/32" single-strength glass unless noted on product series page.





Arete Patio Doors

excellence in every way possible





J2
with
SmartClean*

 Joyce Manufacturing Company 800.824.7988 Arete (JPD) Vinyl Frame • LoE ⁺ /Clear Argon • SmartEdge Spacer Sliding Doors 		Although J2 is not an ENERGY STAR [®] certified glass, this option is still an excellent choice for homes in any area of the country. It offers enhanced energy efficiency that will make your home more comfortable and help keep your home energy bills lower.
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.28 0.30		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.56 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product use. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		





J21
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Arete (JPD) Vinyl Frame • LoE ⁺ /LoE Argon • SmartEdge Spacer Sliding Doors 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.24 0.29		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.55 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product use. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		

J3
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Arete (JPD) Vinyl Frame • LoE ⁺ /Clear Argon • SmartEdge Spacer Sliding Doors 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.27 0.22		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.52 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product use. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		



J31
with
SmartClean

 Joyce Manufacturing Company 800.824.7988 Arete (JPD) Vinyl Frame • LoE ⁺ /LoE Argon • SmartEdge Spacer Sliding Doors 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.23 0.22		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.51 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product use. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		





Silensia Patio Doors

unrivalled versatility and performance





J2

 Joyce Manufacturing Company 800.824.7988 Silensia (JPD) Vinyl Frame • LoE ⁺ /Clear Argon • Endur Spacer Sliding Doors 		Although J2 is not an ENERGY STAR [®] certified glass, this option is still an excellent choice for homes in any area of the country. It offers enhanced energy efficiency that will make your home more comfortable and help keep your home energy bills lower.
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.29 0.27		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.51 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product use. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		





J21

 Joyce Manufacturing Company 800.824.7988 Silensia (JPD) Vinyl Frame • LoE ⁺ /LoE Argon • Endur Spacer Sliding Doors 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.25 0.26		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.50 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product use. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		

J3

 Joyce Manufacturing Company 800.824.7988 Silensia (JPD) Vinyl Frame • LoE ⁺ /Clear Argon • Endur Spacer Sliding Doors 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.28 0.20		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.47 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product use. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		

J31

 Joyce Manufacturing Company 800.824.7988 Silensia (JPD) Vinyl Frame • LoE ⁺ /LoE Argon • Endur Spacer Sliding Doors 		ENERGY STAR[®] Certified in Highlighted Regions  energystar.gov/windows 
ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P) Solar Heat Gain Coefficient 0.24 0.20		
ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Air Leakage (US/I-P) 0.46 ≤0.3		
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions, and a specific product use. NFRC does not recommend any product and does not warrant the suitability of any product for specific use. Consult manufacturer's literature for other product performance information.</small> www.jmfc.org		

Performance ratings are for a standard size 5' or 6' patio door using 1/8" double-strength tempered glass.

*SmartClean is optional on J2 glass.

Glossary

Air Leakage: Measurement of how much outside air comes into a home or building through a product. The lower the air leakage, the better a product is at keeping air out.

Argon: A non-toxic gas used in insulating units to reduce heat transfer.

Climate Zone: A geographical region based on climatic criteria as specified by ENERGY STAR.

ENERGY STAR: A program run by the U.S. Environmental Protection Agency and U.S. Department of Energy to deliver cost-saving energy efficiency solutions that protect the climate and public health through improving air quality. The energy performance of all ENERGY STAR qualified windows, doors, and skylights must be independently tested, certified, and verified according to test procedures established by the National Fenestration Rating Council (NFRC)

LoE: Also known as Low-E, refers to low-emittance coating.

National Fenestration Rating Council (NFRC): A third-party non-profit organization that sponsors certified rating and labeling to help consumers compare the performance of windows, doors, and skylights.

Solar Heat Gain Coefficient: Rating ranges from 0 to 1. Measures fraction of solar radiation admitted through the window. The lower the number, the less solar heat it transmits and the greater its shading ability.

U-Factor: Ratings range from 0 to 1. The lower the number, the better its insulating value.

Visible Transmittance: The fraction of the visible spectrum that is transmitted through the window. The higher the number, the more visible light it transmits.

All ENERGY STAR Ratings are calculated using window style and series noted. Actual ratings may vary by style and size of window.

Performance ratings are shown for windows without grids or mutton bars between the panes and single-strength glass unless noted.

All ratings were calculated using a 90% argon gas fill rate, although Joyce gas chamber average fill percentage routinely exceeds 90%.

NFRC ratings are based on modeling by a third-party agency as validated by an independent test lab in compliance with NFRC program and procedural requirements.

Due to ongoing product changes, updated test results or new industry standards or requirements, this data may change over time and this published technical guide is subject to change without notice. Please consult an authorized Joyce Window Dealer or Joyce Manufacturing Company to verify if any variations exist.

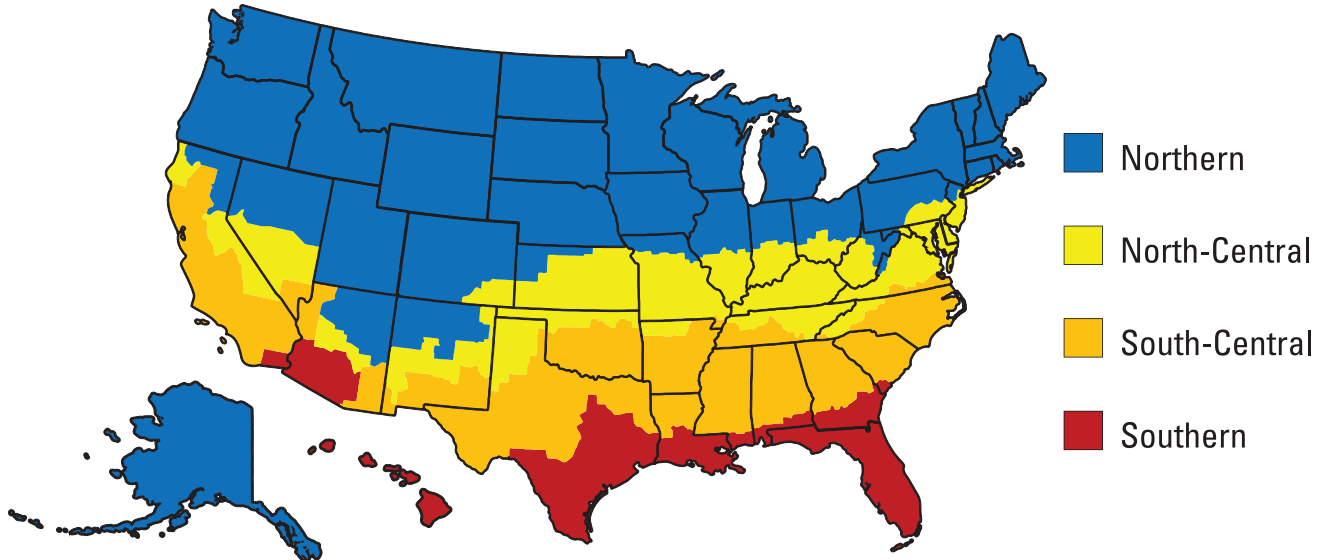
Heritage double-hung windows come standard with foam fill in select interior cavities of the main frame and sash profiles. Trinity double-hung test results reflect same foam fill configuration noted on page 4.



LEARN MORE AT
energystar.gov

ENERGY STAR® for Windows, Doors, and Skylights

CLIMATE ZONE MAP



ENERGY STAR® Certification Criteria for Residential Windows

WINDOWS			
Climate Zone	U-Factor ¹	SHGC ²	
Northern	≤ 0.22	≥ 0.17	Prescriptive
	= 0.23	Equivalent Energy Performance	
	= 0.24		≥ 0.35
	= 0.25		≥ 0.40
	= 0.26		
North-Central	≤ 0.25	≤ 0.40	
South-Central	≤ 0.28	≤ 0.23	
Southern	≤ 0.32	≤ 0.23	

Air Leakage ≤ 0.3 cfm/ft²
¹ Btu/h-ft²-°F
² Solar Heat Gain Coefficient

ENERGY STAR® Certification Criteria for Residential Doors

DOORS			
Glazing Level	Climate Zone	U-Factor ¹	SHGC ²
Opaque	All Zones	≤ 0.17	No Rating
	≤ ½-Lite	All Zones	≤ 0.23
> ½-Lite	Northern	≤ 0.26	≤ 0.40
	North-Central		
	South-Central	≤ 0.28	≤ 0.23
	Southern		

Air Leakage for Sliding Doors ≤ 0.3 cfm/ft²
 Air Leakage for Swinging Doors ≤ 0.5 cfm/ft²
¹ Btu/h-ft²-°F
² Solar Heat Gain Coefficient



The ENERGY STAR Most Efficient 2025 is a designation that truly represents the best of ENERGY STAR. The Most Efficient Mark is designed to recognize a select group of ENERGY STAR products


as the “best of the best” for energy savings and innovation. The goal of this effort is to recognize products that deliver cutting-edge energy efficiency along with the latest in technological innovation—a simple choice for those seeking the very best of both.

To earn the ENERGY STAR Most Efficient 2025 designation, products must already qualify for the ENERGY STAR label. Then, each year, the EPA establishes criteria that specific product categories – such as windows and sliding glass patio doors – must meet to earn ENERGY STAR Most Efficient recognition. The above chart shows the 2025 certification criteria for windows and sliding patio doors.

ENERGY STAR® Most Efficient Recognition Criteria for Windows and Sliding Glass Doors

Climate Zone	U-factor	SHGC
Northern	≤ 0.20	≥ 0.20
North-Central	≤ 0.20	≤ 0.40
South-Central	≤ 0.20	≤ 0.23
Southern	≤ 0.21 = 0.22	≤ 0.23 ≤ 0.21

Performance criteria for windows, doors, and skylights are based on 2024 ratings certified by the National Fenestration Rating Council (NFRC), and vary for each of the climate zones shown in the map above. Joyce Manufacturing Company is an ENERGY STAR Partner.



Scan to Learn More
About Joyce's ENERGY STAR®
Partnership



Scan to Learn More
About Which Climate Zone
Your County Is In



Scan to Learn More About
SmartShield Glass Packages

1125 BERA INDUSTRIAL PARKWAY • BERA, OH 44017 • (800) 824-7988 • WWW.JOYCEMFG.COM

©2025 Joyce Mfg. Co. Joyce Windows are independently tested and certified according to test procedures established by the National Fenestration Rating Council (NFRC). All NFRC labels report whole window performance. NFRC labels and ratings for each window can change with window type, options and packages, and are accurate at the time of publishing. Listed ratings can vary depending on options. Testing data and actual labels are subject to change without notice. ENERGY STAR® is a registered trademark of the U.S. Environmental Protection Agency. SmartShield Glass is intellectual property of Joyce Manufacturing, and Endur™ is trademark of Cardinal Glass Industries [QBP17M00614]. Joyce reserves the right to substitute for likeness with Cardinal Endur™ spacer system and/or comparable packages if product selection is not available.

051326